


Tri-Purpose Valve 8011-C & 8011-CP Installation

DIAPHRAGM TRI-PURPOSE VALVE

Pressure Relief Valve


The Tri-Purpose Valve is an excellent relief valve. It can be adjusted after installation to open at any desired pressure between 30 PSI (2.1 kg/cm²) and 125 PSI (8.8 kg/cm²).

When used as a pressure relief valve, the Tri-Purpose Valve should be installed on the branch of a tee whose run is in the pressure line. Flow direction through the valve when used as a pressure relief valve is 180° opposite the anti-syphon and back pressure flow direction. See data plate on base of valve.

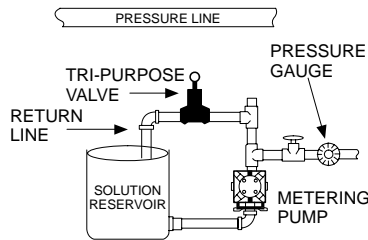

Anti Syphon Valve


The Tri-Purpose Valve can be installed as an anti-syphon valve to prevent syphoning fluid through a metering pump or other feeding system where liquid is being fed into negative pressure (e.g. pump suction). The greater the negative pressure, the tighter the diaphragm seats. Install with flow direction as shown on data plate on base of valve.

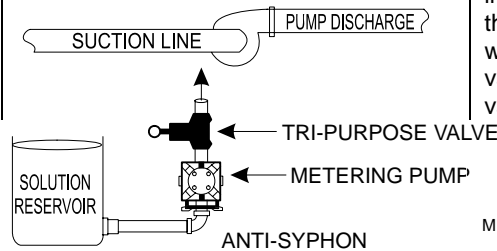

The Tri-Purpose Valve may be installed horizontally or vertically. All parts except the body may be serviced or replaced without removing the valve from the line.

Back Pressure Valve

The Tri-Purpose Valve can also be installed so as to require a metering pump or other injection device to develop a positive pressure in order to feed through it. The opening pressure is approximately 30-40 PSI. Useful for feeding or metering into an open tank or reservoir located at a level below the supply tank. As a back pressure valve, it should be installed so that the flow direction is the same as the direction of flow when used as an anti-syphon valve. See data plate on base of valve.

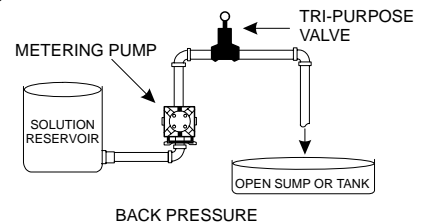


INSTALLATION NOTES

1. Your Tri-Purpose Valve may be installed in any position. The axis of the inlet and outlet ports may be at any angle.
2. If the valve is to be installed in a plastic pipeline (PVC or other), the line may be threaded directly into the valve body if desired. It is recommended, however, that a PVC pipe nipple and union be used on at least one side to permit ease of dismounting.
3. Flow direction for both Anti-Syphon and Back Pressure functions should be from the annular port to the central port. See the data plate on bottom of valve body. This function is not adjustable.
4. Flow for the Pressure Relief function should be from the central port to the annular port. Note that in this case, the valve is not installed "in-line", but on a tee, and the direction referred to in this function is the flow direction of relieved fluid back to the solution container or to waste. It is important that a pressure gauge be installed (at least temporarily) upstream of the Tri-Purpose Valve in order to permit checking of the pressure setting.
5. The Tri-Purpose Check Valve is shipped at a low pressure setting. To increase the opening pressure of the valve, tighten down (clockwise looking from the pull rod end) the No. 8007 adjustment nut while watching the upstream pressure gauge. When the desired pressure is reached, the pressure gauge may be valved off, although it is helpful to leave the pressure gauge installed in order to permit easy checking of the opening pressure from time to time.

Tri-Purpose Valve 8011-C & 8011-CP Installation

6. If it is desired to open the valve temporarily, pull the 6831 ring. This relieves the spring pressure on the diaphragm and permits flow through the valve, reducing pressure.
7. Do not use your Tri-Purpose Valve on any fluids which contain solvents or other chemicals which might attack PVC or polypropylene.
8. Do not install the Tri-Purpose Valve where it may be required to relieve a flow volume greater than that shown on the capacity rating chart. Note the difference between the valve's flow capacity when used on a pulsating flow, such as that delivered by a reciprocating pump, and the rating for a steady flow. Where a greater relief flow is required, two or more valves should be installed on a manifold.
9. Maximum solution temperature is 135°F (55°C).


SPECIFICATIONS

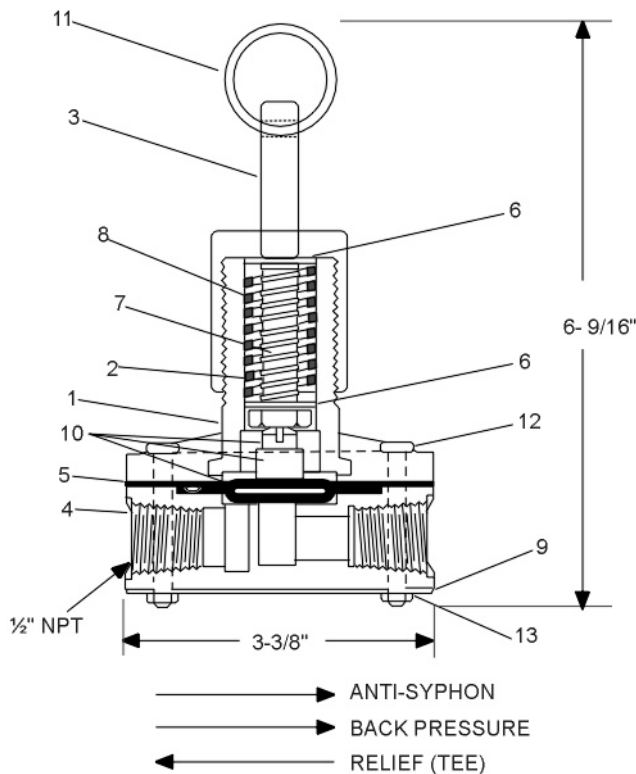

Model No.	Connection	Liquid Contacting Parts	
		Valve Body	Diaphragm
8011-C	½" NPTF	PVC	Teflon face
8011-CP	½" NPTF	Polypropylene	Teflon face

Item	Part No.	Description	Qty Req'd
1	8005	Spring housing	1
2	8007	Adjustment nut	1
3	8008	Pull rod	1
4	8009	Valve body, PVC	1
4	8009-1	Valve body, polypropylene	1
5	8010-1	Spring housing retainer	1
6	8013	Washer	2
7	8014	Inner spring	1
8	8015	Outer spring	1
9	8019	Nameplate, 8011-C	1
9	8019-1	Nameplate, 8011-CP	1
10	51060	Diaphragm, Teflon face	1
11	6831	Ring	1
12	368	Screw, 10-24 x 1-5/8	4
13	576	Nut	4
14	----	Instruction Sheet	1

Tri-Purpose Valve 8011-C & 8011-CP Installation

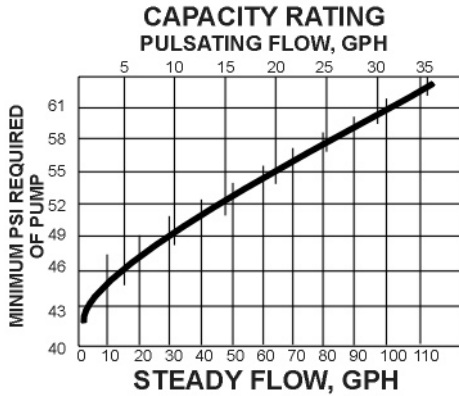

Part No.	For	Required per valve
4542-W	PVC assembly for 1/2" OD Polyethylene tubing	2
4548	PVC assembly for 5/8" OD Polyethylene tubing	2
10804	Polypropylene assembly for 1/2" OD Polyethylene tubing	2
20050	PVC assembly for 3/8" OD Polyethylene tubing	2

For steady, non-pulsating flows, use the capacity rating shown on the bottom scale. For pulsating flows, use the top scale.

Do not use on systems exceeding 150 psi.

LIMITED WARRANTY

Walchem is an Iwaki America Incorporated Company (hereinafter "Walchem")

WALCHEM warrants equipment of its manufacture, and bearing its identification to be free from defects in workmanship and material for a period of 12 months from the date of delivery from the factory or authorized distributor under normal use and service and otherwise when such equipment is used in accordance with instructions furnished by WALCHEM and for the purpose disclosed in writing at the time of purchase, if any. WALCHEM's liability under this warranty shall be limited to replacement or repair, F.O.B. Holliston, MA U.S.A. of any defective equipment or part which, having been returned to WALCHEM, transportation charges prepaid, has been inspected and determined by WALCHEM to be defective. Replaceable elastomeric parts are expendable and are not covered by any warranty.

THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTY, EITHER EXPRESS OR IMPLIED, AS TO DESCRIPTION, QUALITY, MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE OR USE, OR ANY OTHER MATTER.

Under no circumstances shall Walchem be liable to Buyer or any third party for any loss of profits or other direct or indirect costs, expenses, losses or consequential damages arising out of or as a result of any defects in or failure of its products or any parts thereof.

